

NVR

4/8 CH PoE NVR

6MP/5MP/4MP/3MP/1080P/720P HD PoE NVR



TD-3100B1-0P



This series of products supports 4/8 CH 6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P high definition IP input, which adopts the most advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

This series of products integrates with 4/8 PoE network ports and supports 4/8 CH IPC direct connection to NVR, simultaneous 4/8 CH playback and 1080P high definition display. The series of products can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



en.tvt.net.cn

For more information, please visit our website

Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777

E-mail: overseas@tvt.net.cn


SPECIFICATIONS

Model		TD-3104B1-4P	TD-3108B1-8P	
System	OS	Embedded Linux		
Video	Network Input	4 CH IPC input	8CH IPC input	
	Network Input Resolution	6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF		
	Output	HDMI × 1: 1920 × 1080 / 1280 × 1024/ 1024 × 768 VGA × 1: 1920 × 1080 / 1280 × 1024/ 1024 × 768		
	Compression	H.265S / H.265+ / H.265 / H.264		
Audio	Network Input	4 CH IPC audio input	8 CH IPC audio input	
	2-way Audio	No		
	Local Output	No (HDMI supports the audio output)		
	Compression	G.711(U/A)		
Record	Record Stream	Dual stream recording		
	Resolution	6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF		
	Frame Rate	6MP @20fps(NTSC/PAL); 5MP or lower @30fps/25fps(NTSC/PAL)		
Playback	Simultaneous Playback	Max. 4 CH	Max. 8 CH	
	Search	Time slice / time / event / tag / smart search		
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events		
	Function	Play, pause, FF, FB, digital zoom, etc.		
Decoding Capability	Live View/ Playback	1CH 6MP; 4CH 720P		
Alarm	Mode	Manual, sensor, motion, exception, smart events		
	Input	Supports IPC alarm input		
	Output	Supports IPC alarm output		
	Triggering	Record, snapshot, buzzer, preset, e-mail, etc.		
Network	Interface	RJ 45 100Mbps × 1		
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, RTSP, SNMP, ONVIF, etc.		
	Incoming Bandwidth	28 Mbps	40 Mbps	
	Outgoing Bandwidth	28 Mbps	40 Mbps	
	Client Connection	Max.10 users access		
LPR	Plate Recognition	Yes		
Mobile Device	OS	iOS, Andriod		
Storage	HDD Interface	SATA2.0 × 1, max 8T		
	Local Backup	U disk, USB mobile HDD		
Backup	Network Backup	Yes		
	USB	USB 2.0 × 2		
Port	Remote Controller	Optional		
	PoE	PoE Ports	100M RJ45 × 4	100M RJ45 × 8
PoE	Standards	IEEE802.3af		
	Output Power	≤ 40W	≤ 80W	
Others	Power Supply	DC 48V/1.25A	DC 48V/2.5A	
	Consumption	< 6W (without HDD)		
	Dimensions(mm)	255 × 222 × 42 (W × D × H)		
	Working Environment	-10 ~ 50 °C, 10% ~ 90% humidity		
	Certificate	CE, FCC		
Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE			

Features


- Support 4/8 CH 6MP/5MP/4MP/3MP/1080P/1280×1024/ 960P/720P/960H/DI/CIF IP video input
- H.265S/H.265+/H.265/H.264
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor/ POS / AI recording
- Playback : 4 /8CH simultaneous playback
- Search : time slice, time, event, tag, smart search
- Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Support POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- 4/8 PoE network ports, support IPC direct connection to NVR; support PoE power supply
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 1080P output, true high resolution display
- Support NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Android OS

DIMENSIONS

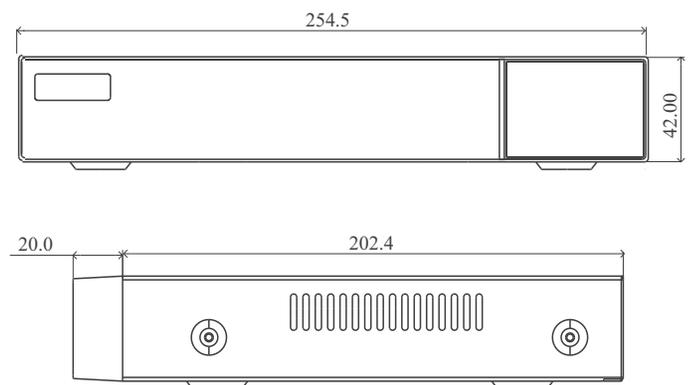

Rear Panel

TD-3104B1-4P

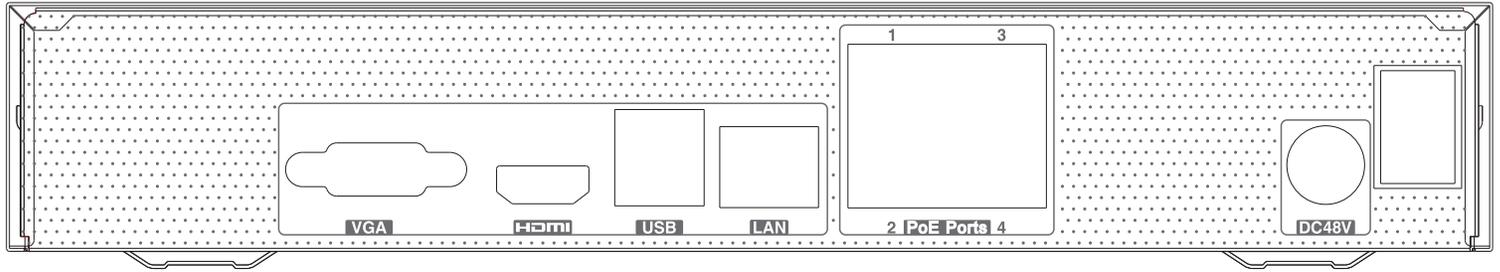

TD-3108B1-8P

